

**PLEASE FILL IN THE FORM AS COMPREHENSIVELY AS POSSIBLE OR ATTACH
A DRAWING OR SKETCH AND SEND TO INFO@AAG.WORLD**

One-time requirementunits

Annual requirement units

Lot size units

Where do you wish to use the bellows?


Mounting position: ☐ horizontal ☐ vertical

Use: ☐ Outdoor ☐ Indoor ☐ Temperature range: -°C / +°C

☐ Work cycles/min ☐ Working hours per day

☐ Spindle dia. mm ☐ Pitch mm ☐ r.p.m

! Please tick the desired type and specify the dimensions.

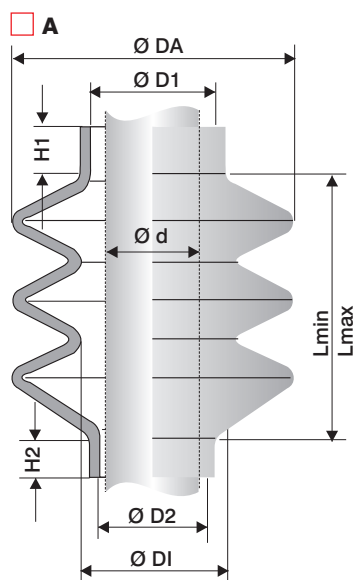

d mm DI mm

Lmin mm DA mm

Lmax mm DA1 mm

D1 mm H1 mm


D2 mm H2 mm

On request:

only for Theku and PowerGuard bellows)

☐ Air vents

☐ Zipper

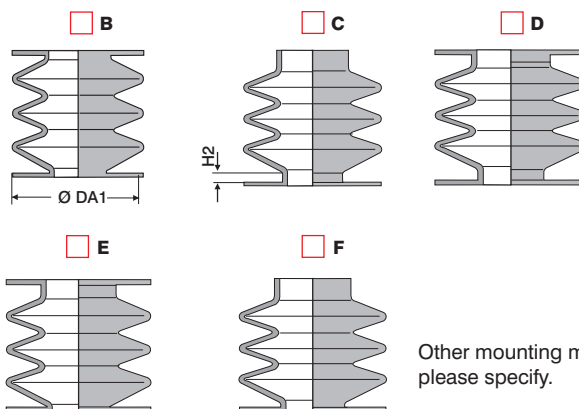

Other mounting method
please specify.

? What media will the bellows be exposed to?

	inside	outside	permanently	sometimes
Dust	☐	☐	☐	☐
Water	☐	☐	☐	☐
Oil/Grease*	☐	☐	☐	☐
Acid*	☐	☐	☐	☐
Leaches*	☐	☐	☐	☐
Weld spatters* (°C).....	☐	☐	☐	☐
Pressure* (max. 0,15 bar)	☐	☐	☐	☐

* Please specify