

Designation

POLO-RDS evolution ribbed pipe

Material

Polypropylene

Dimensions

DN 100, DN 150, DN 200, DN 300

Overall length

300 mm, can be shortened using tear-off elements to 250 mm or 200 mm

Colour

Purple red, RAL 3004

Area of application

Installation in concrete walls, floor plates and ceilings

External beading for linking of settlement protection

Multiple arrangement in flange to flange package

Impermeability

Impermeable to leachate and hydrostatic


water pressure of a water column of up to 10 m

Temperature range


-30 °C to +100 °C

Installation temperature

from 0 °C and above

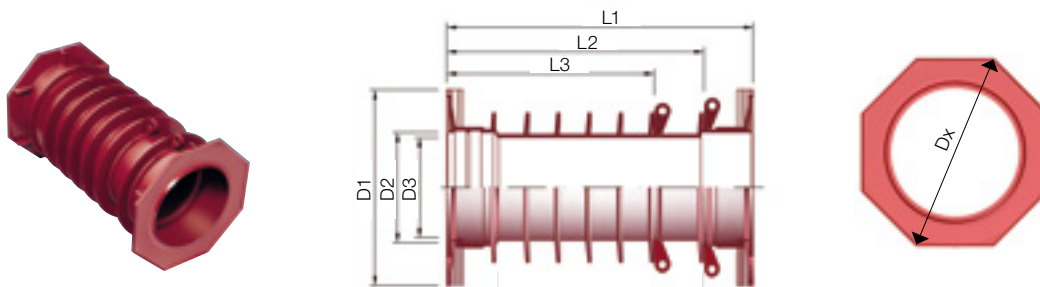

Multiple arrangement of ribbed pipe

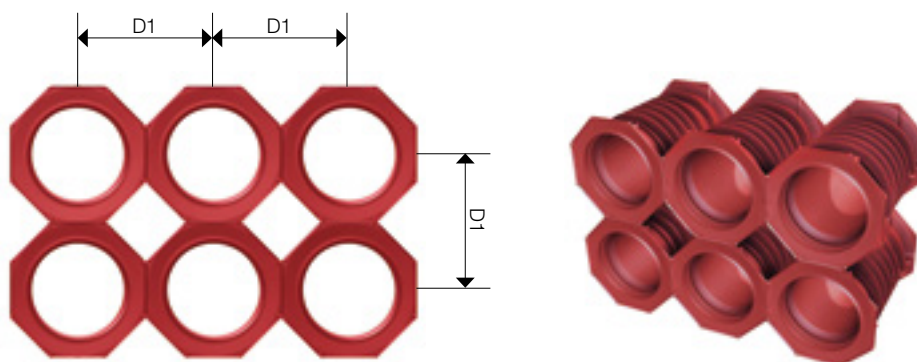

Dimensions in mm

Dimensions	A. no.	Overall length	L1	L2	L3	D1	D2	D3	Dx	Weight/kg
RDS ribbed pipe DN 100	01030	300	307	258	208	170	110	100	184	0.65
RDS ribbed pipe DN 150	01036	300	306	256	206	220	162	150	238	0.85
RDS ribbed pipe DN 200	01031	300	308	257	208	270	202	200	292	1.20
RDS ribbed pipe DN 300	01034	300	306	257	206	386	315	300	415	2.05