



AAG CATALOGUE

cordplast® flexible pvc hoses



FOODSTUFFS SUCTION DELIVERY SPIRAL PVC HOSES

cordflex L.D.	4
cordflex N.T.	4
cordflex H.D.	5
vinorex for wine	5

WATER SUCTION DELIVERY STEEL PVC HOSES

cordsteel S.E.	6
cordsteel P.L.	6

WATER SUCTION DELIVERY SPIRAL PVC HOSES

cordflex S.T.	7
cordflex medium	7
cordflex heavy	8
cordflex S.E.	8
cordflex PU	9
cordflex heavy PU	9

SUCTION DELIVERY SPIRAL PVC HOSES FOR POOL & JACUZZI

cordflex idros	10
----------------	----

VACUUM SPIRAL PVC HOSES



cordflex air	11
cordflex air/p	11
thermocord HL	12
thermocord 130°C	12
thermocord calor 150°C	13
thermocord neoprene 150°C 1 layer	13
thermocord neoprene 150°C 2 layers	14
thermocord silicone 300°C 1 layer	14
thermocord silicone 300°C 2 layers	15

VACUUM SPIRAL POLYURETHANE HOSES

cordflex air PU	16
cordflex air PU antistatic	16
aerocord PU	17
aerocord PU/ECO	17
aerocord PU - H	18

OIL SUCTION DELIVERY SPIRAL PVC HOSES	19
cordflex oil S.E.	19
cordflex oil antistatic	19
LAYFLAT PVC HOSES	20
cordflat L light	20
cordflat M medium	20
cordflat P heavy	21
cordflat I industrial	21
BRAIDED SPRAYING PVC HOSES	22
fruttcord 25 bar	22
fruttcord 40 bar	22
fruttcord 50 bar	23
fruttcord 80 bar	23
fruttcord 100 bar	24
BRAIDED INDUSTRIAL PVC	25
presscord 10 bar	25
presscord 20 bar	25
presscord PU polyurethane	26
presscord super	26
BRAIDED GARDEN PVC HOSES	27
elbacord no twist	27
gardencord VG	27
nemocord no twist	27
BRAIDED AND NOT BRAIDED PVC HOSES	28
cristalcord	28
cristallo alimentare	28
cristalsil FDA	29
cristalbenz	29
SPIRAL PROTECTION PVC HOSES	30
cordflex guaina UL 94 VO	30
helimoplen	30
mollaflex	31



 INSIDE DIAMETER	 VACUUM
 OUTSIDE DIAMETER	 WEIGHT
 WALL THICKNESS	 BENDING RADIUS
 WORKING PRESSURE	 LENGHT
 BURST PRESSURE	 TEMPERATURE THE INDICATED DATA ARE FOR A WORKING TEMPERATURE OF 20°C.

CORDFLEX L.D.




CONSTRUCTION STRONG, FLEXIBLE, AND SMOOTH NON-TOXIC PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.
COVER CRUSHING, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE.
APPLICATION FOR DELIVERY OF MINERAL WATERS, FRUIT JUICES, WINES, LIQUEURS UP TO 15% ALCOHOL CONTENTS ALIMENTARY LIQUIDS ETC.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	2,4	195	23	0,65	80
25	2,5	230	21	0,65	100
30	2,8	280	19	0,65	120
32	2,8	290	18	0,65	128
35	3,5	380	17	0,65	140
38	3,2	420	17	0,65	152
40	3,3	470	16	0,65	160
45	3,3	530	15	0,65	180
50	3,6	640	14	0,65	200
60	3,6	800	12	0,65	240

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



CORDFLEX N.T.




CONSTRUCTION STRONG, FLEXIBLE, AND SMOOTH NON-TOXIC PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.
COVER CRUSHING, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE.
APPLICATION FOR DELIVERY OF MINERAL WATERS, FRUIT JUICES, WINES, LIQUEURS UP TO 15% ALCOHOL CONTENTS ALIMENTARY LIQUIDS ETC.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	2,7	240	28	0,8	85
25	2,9	300	22	0,8	112
30	3,1	345	21	0,8	135
32	3,2	370	20	0,8	144
35	3,2	415	19	0,8	157
38	3,3	470	18	0,8	171
40	3,5	505	18	0,8	180
45	3,5	570	17	0,8	202
50	3,8	690	15	0,8	225
60	4,0	825	13	0,7	270
70	4,5	1080	12	0,7	315
75	4,6	1260	12	0,7	337
80	4,8	1400	12	0,6	360
90	5,1	1620	11	0,6	405
100	5,9	1850	11	0,6	459
110	6,1	2250	11	0,5	495
120	6,3	2700	10	0,4	540
125	6,6	2880	10	0,4	562
150	7,0	3870	9	0,3	675
200	8,5	5950	7	0,2	900

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



CORDFLEX H.D.



CONSTRUCTION STRONG, FLEXIBLE, AND SMOOTH NON-TOXIC PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE.

APPLICATION FOR DELIVERY OF MINERAL WATERS, FRUIT JUICES, WINES, LIQUEURS UP TO 15% ALCOHOL CONTENTS ALIMENTARY LIQUIDS ETC.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	3,0	300	25	0,8	90
25	3,2	350	24	0,8	110
30	3,4	440	21	0,8	125
32	3,5	460	21	0,8	130
35	3,6	520	20	0,8	140
38	3,9	570	19	0,8	155
40	4,0	590	19	0,8	165
45	4,0	670	19	0,8	195
50	4,3	830	16	0,8	215
60	4,7	950	15	0,7	260
70	4,9	1150	13	0,7	310
80	5,1	1530	13	0,6	350
90	5,3	1750	13	0,6	415
100	5,5	2150	12	0,6	450

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



VINOREX FOR WINE



CONSTRUCTION STRONG, FLEXIBLE, AND SMOOTH NON-TOXIC PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE.

APPLICATION FOR DELIVERY OF MINERAL WATERS, FRUIT JUICES, WINES, LIQUEURS UP TO 15% ALCOHOL CONTENTS ALIMENTARY LIQUIDS ETC.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	3	335	28	0,9	100
25	3	400	24	0,9	125
30	3,5	535	21	0,9	150
32	3,5	580	21	0,9	160
35	3,7	630	21	0,9	175
38	3,7	680	21	0,9	190
40	3,7	710	21	0,9	200
45	4,2	815	21	0,9	225
51	5	1165	17	0,95	300
60	5,5	1550	17	0,95	360
63	5,6	1700	17	0,95	378
70	5,7	1845	14	0,95	420
76	6	1940	14	0,95	450
80	6,4	2135	14	0,95	480
90	6,7	2425	14	0,95	540
102	7,2	3200	12	0,95	600
110	7,7	3590	12	0,9	660
120	7,8	3880	12	0,9	720
152	8,7	6100	10,5	0,9	900

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



CORDSTEEL S.E.




CONSTRUCTION STRONG, VERY FLEXIBLE AND SMOOTH NON-TOXIC, TRANSPARENT
PLASTICIZED PVC. SHOCK RESISTANT GALVANISED STEEL SPIRAL WIRE.
COVER CRUSHING, ABRASION AND WEATHER RESISTANT, SMOOTH OUTSIDE.
APPLICATION FOR SUCTION AND DELIVERY OF WATER, MINERAL WATER, FRUIT JUICES,
LIQUIDS ETC. EN SHIPYARDS, INDUSTRIES, BUILDINGS, AGRICULTURAL
AND INDUSTRIAL MACHINERIES.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
10	3,1	180	12	0,9	23
12	3,1	190	12	0,9	24
14	3,1	230	12	0,9	28
16	3,1	260	12	0,9	32
18	3,5	296	11	0,9	28
20	3,5	340	10	0,9	30
22	3,7	400	10	0,9	33
25	4,0	520	10	0,9	38
30	4,2	630	9	0,9	45
32	4,2	660	9	0,9	48
35	4,3	750	9	0,9	52
38	4,5	800	9	0,9	57
40	4,8	950	9	0,9	60
45	4,9	1150	9	0,9	67
50	5,4	1300	7	0,9	75
60	6,0	1750	6	0,9	120
63	6,1	1800	6	0,9	130
70	6,7	2100	5	0,9	140
80	6,3	2500	4	0,8	160
90	6,5	2900	4	0,8	180
100	7,5	3650	3	0,8	200
110	7,0	3950	3	0,8	220
120	8,0	4300	3	0,8	240
125	8,0	4600	3	0,8	250
150	10,0	6500	2,5	0,8	300

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



CORDSTEEL P.L.




CONSTRUCTION STRONG, VERY FLEXIBLE AND SMOOTH NON-TOXIC, TRANSPARENT
PLASTICIZED PVC. SHOCK RESISTANT GALVANISED STEEL SPIRAL WIRE.
COVER CRUSHING, ABRASION AND WEATHER RESISTANT, SMOOTH OUTSIDE.
APPLICATION FOR SUCTION AND DELIVERY OF WATER, MINERAL WATER, FRUIT JUICES,
LIQUIDS ETC. EN SHIPYARDS, INDUSTRIES, BUILDINGS, AGRICULTURAL
AND INDUSTRIAL MACHINERIES.


					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
12	3,0	180	7	0,85	25
14	3,0	200	6	0,85	30
16	3,1	225	6	0,85	35
18	3,1	280	6	0,85	40
20	3,1	340	5	0,85	50
22	3,2	370	5	0,85	55
25	3,2	510	5	0,85	60
30	3,5	600	4	0,85	70
32	3,9	650	4	0,85	75
35	4,2	730	4	0,85	80
38	4,4	800	4	0,85	90
40	4,5	870	3	0,85	95
45	5,1	1100	3	0,8	105
50	5,1	1200	3	0,8	125
60	6,5	1800	2,5	0,7	135
63	6,5	1950	2,5	0,7	150
70	7	2200	2	0,7	180
76	7	2500	2	0,7	195
80	7,5	2700	2	0,7	220
90	7,5	3000	2	0,6	260
102	8	3400	2	0,6	300

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307



CORDFLEX S.T.

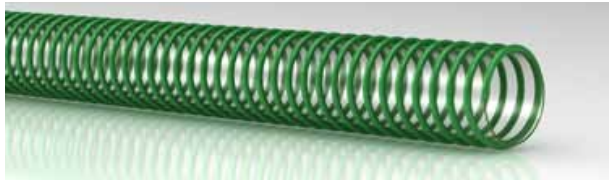

CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT,
LIGHT CORRUGATED OUTSIDE.

APPLICATION FOR IRRIGATION, DELIVERY OF WATER, FERTILIZERS, INSECTICIDES, ACIDS,
DETERGENTS, SOLUTIONS ETC. IN AGRICULTURAL, INDUSTRIAL
APPLICATIONS AND CONSTRUCTIONS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	2,7	270	28	0,8	85
25	2,9	300	22	0,8	112
30	3,1	380	21	0,8	135
32	3,2	400	20	0,8	144
35	3,2	440	19	0,8	157
38	3,3	470	18	0,8	171
40	3,5	520	18	0,8	180
45	3,5	570	17	0,8	202
50	3,8	690	15	0,8	225
60	4,0	900	13	0,7	270
70	4,5	1080	12	0,7	315
75	4,6	1260	12	0,7	337
80	4,8	1440	12	0,6	360
90	5,1	1620	11	0,6	405
100	5,9	1980	11	0,6	459
110	6,1	2250	11	0,5	495
120	6,3	2520	10	0,4	540
125	6,6	2880	10	0,4	562
150	7,0	3870	9	0,3	675
200	8,5	5850	7	0,2	900

NORMS

ISO 1307



CORDFLEX MEDIUM



CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT,
LIGHT CORRUGATED OUTSIDE.

APPLICATION FOR MEDIUM-DUTY SUCTION AND DELIVERY OF WATER, SALT WATER,
LIGHT CHEMICALS, LIQUIDS ETC. IN AGRICULTURAL, INDUSTRIAL
APPLICATIONS AND CONSTRUCTIONS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	4,0	335	8	0,9	95
25	4,2	400	7	0,9	125
30	4,3	535	7	0,9	150
32	4,4	580	7	0,9	160
35	4,4	610	7	0,9	175
38	4,5	680	6	0,9	190
40	4,5	710	6	0,9	200
45	4,6	815	6	0,9	225
50	4,7	970	6	0,9	250
60	5,0	1240	6	0,9	300
63	5,2	1405	5,5	0,8	315
65	5,2	1435	5,5	0,8	325
70	5,5	1550	5,5	0,8	350
75	5,8	1680	5,5	0,8	375
80	5,9	1795	5,5	0,8	400
90	6,0	2055	5	0,8	450
100	6,3	2600	4	0,8	500
110	6,6	2910	4	0,8	550
120	6,8	3200	4	0,8	600
125	7,0	3395	4	0,8	625
130	7,0	3500	4	0,8	640
140	7,3	3900	4	0,8	710
150	8,0	5000	3	0,8	850
200	9,5	7560	2,5	0,8	1000

NORMS

ISO 1307



CORDFLEX HEAVY



CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH PLASTICIZED PVC. SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE.

APPLICATION FOR HEAVY-DUTY SUCTION AND DELIVERY OF WATER, SALT WATER, LIGHT CHEMICALS, LIQUIDS ETC. IN AGRICULTURAL, INDUSTRIAL APPLICATIONS AND CONSTRUCTIONS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	4,6	415	9	0,95	114
25	4,6	555	8	0,95	150
30	4,8	630	8	0,95	180
32	4,8	680	8	0,95	192
35	5,0	730	8	0,95	210
38	5,0	775	7	0,95	228
40	5,0	825	7	0,95	240
45	5,1	970	7	0,95	270
50	5,6	1165	7	0,95	300
60	5,9	1550	7	0,95	360
70	6,1	1845	6	0,95	420
75	6,2	1940	6	0,95	450
80	6,4	2135	6	0,95	480
90	6,6	2425	6	0,95	540
100	7,2	3200	5	0,95	600
110	7,8	3590	5	0,95	660
120	7,9	3880	5	0,9	720
125	8,3	4075	5	0,9	750
150	9,8	6110	4	0,9	900
200	12,0	8730	3	0,9	1200

NORMS

ISO 1307



CORDFLEX S.E.



CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH SPECIAL SUPERELASTIC MATERIAL. SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, CORRUGATED SLIDING OUTSIDE

APPLICATION FOR MEDIUM DUTY SUCTION AND DELIVERY OF WATER, SALT WATER, LIGHT CHEMICALS, LIQUIDS ETC. IN AGRICULTURAL, INDUSTRIAL APPLICATIONS CONSTRUCTIONS, SEWER PURGING, SLUDGE, SLURRIES, WASTE MATTER, SAND AND GRAVEL, ETC. ESPECIALLY FOR USE IN COLD CLIMATES

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	4,0	370	6,0	0,9	65
25	4,0	440	6,0	0,9	87
30	4,2	540	5,5	0,9	120
32	4,2	600	5,5	0,9	112
35	4,2	630	5,5	0,9	125
38	4,2	700	4,5	0,9	133
40	4,2	750	4,5	0,9	140
45	4,4	860	4,5	0,9	160
50	4,6	1010	4,5	0,9	176
60	5,0	1250	4,0	0,9	210
70	5,2	1580	3,5	0,8	245
75	5,4	1700	3,5	0,8	262
80	5,6	1830	3,5	0,8	280
90	5,7	2070	3,5	0,8	315
100	6,1	2600	3,0	0,8	357
110	6,3	3100	3,0	0,8	385
120	6,6	3450	3,0	0,8	420
125	6,7	3600	3,0	0,8	437
150	8,0	4800	2,0	0,8	525

NORMS

ISO 1307



CORDFLEX PU



CONSTRUCTION STRONG, FLEXIBLE PLASTICIZED PVC WITH ANTIABRASIVE POLYURETHANE INSIDE LAYER. SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE

APPLICATION FOR HEAVY-DUTY SUCTION AND DELIVERY OF WATER, SLURRIES, DUST AND GRAVELETC. IN INDUSTRIAL AND CONSTRUCTIONS. EXCELLENT RESISTANCE IN ABRASIVE APPLICATIONS.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25	32,8	270	6,5	0,8	100
30	37,6	360	6,0	0,8	120
32	40,7	380	6,0	0,8	128
35	44,1	400	5,5	0,8	140
38	47,1	430	5,0	0,8	152
40	49,5	480	5,0	0,8	160
45	55,5	550	5,0	0,8	180
50	60,5	600	4,5	0,8	200
60	71,3	800	4,0	0,8	240
63	74,3	850	4,0	0,8	252
70	80,0	1000	4,0	0,8	280
76	88,5	1100	4,0	0,8	304
80	93,5	1260	4,0	0,8	320
90	103,7	1400	3,0	0,8	360
100	114,9	1600	3,0	0,8	400
120	135,3	2500	2,0	0,7	480
127	144,7	2700	2,0	0,7	508
150	168,1	3400	1,0	0,6	600

NORMS

ISO 1307



CORDFLEX HEAVY PU

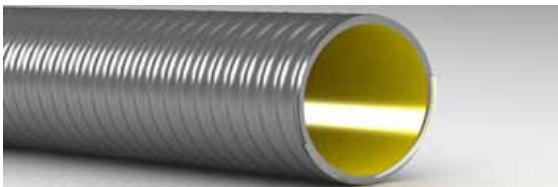

CONSTRUCTION STRONG, FLEXIBLE PLASTICIZED PVC WITH ANTIABRASIVE POLYURETHANE INSIDE LAYER. SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE

APPLICATION FOR HEAVY-DUTY SUCTION AND DELIVERY OF WATER, SLURRIES, DUST AND GRAVEL ETC. IN INDUSTRIAL AND CONSTRUCTIONS. EXCELLENT RESISTANCE IN ABRASIVE APPLICATIONS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25	4,2	500	20	0,9	110
32	4,6	600	17	0,9	120
38	5,0	700	16	0,9	140
40	5,0	770	16	0,9	150
45	5,0	950	15	0,9	140
50	5,2	1050	15	0,9	170
55	5,3	1200	15	0,9	180
60	5,3	1300	15	0,9	190
63	5,6	1400	14	0,9	210
65	5,7	1450	14	0,9	210
70	5,7	1550	13	0,9	220
75	6,0	1750	13	0,9	240
80	6,2	1950	13	0,9	250
90	6,2	2150	12	0,9	290
100	6,3	2700	12	0,9	320
110	6,9	3000	11	0,9	380
120	7,3	3300	10	0,9	480
125	7,8	3600	10	0,9	580
150	8,8	5200	10	0,8	780
160	9,2	5650	9	0,7	930
200	10,5	8000	8	0,7	1100

NORMS

ISO 1307



CORDFLEX IDROS




CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH WHITE PLASTICIZED PVC.
SHOCK RESISTANT WHITE PVC SPIRAL.
COVER CRUSHING, ABRASION AND WEATHER RESISTANT, SMOOTH WHITE PVC OUTSIDE
(CALIBRATED DIAMETERS HIGHLY RECOMMENDED FOR STICKING WITH PVC
FITTINGS)
APPLICATION FOR HIGH PRESSURE PASSAGE OF WARM WATER IN SWIMMING POOLS, JACUZZIS ETC.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
15	2,6	180	10	0,7	60
20	2,75	250	9	0,7	80
28	2,0	280	9	0,7	120
32	4,0	600	10	0,7	130
40	4,0	730	9	0,7	160
42	4,0	720	8	0,7	165
55	4,0	930	5	0,7	220

NORMS

ISO 1307



CORDFLEX AIR



CONSTRUCTION EXTREMELY LIGHT AND FLEXIBLE PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT
CORRUGATED OUTSIDE.

APPLICATION INDUSTRIAL VENTILATION AND AIRFLOW SYSTEMS; SUCTION OF DUST, AIR,
GASES, POWDERS, LIQUIDS ETC.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	24,8	115	1	0,5	28
25	30	165	0,5	0,5	35
30	35,2	215	0,5	0,5	42
32	38	225	0,5	0,5	45
35	41	235	0,5	0,5	47
38	44,2	255	0,5	0,5	50
40	46,5	270	0,5	0,5	55
45	52,2	350	0,5	0,5	60
50	57	435	0	0,45	65
60	68	525	0	0,45	80
70	78,4	620	0	0,45	95
75	84	670	0	0,4	100
80	89	755	0	0,4	110
90	99	805	0	0,4	125
100	110	950	0	0,4	140
110	120,4	1065	0	0,4	150
120	131	1165	0	0,35	170
130	141	1210	0	0,35	175
140	151	1455	0	0,35	190
150	162	1650	0	0,35	200
160	172	1800	0	0,3	220
180	193	2130	0	0,3	250
200	214	2330	0	0,3	280
250	264	3240	0	0,3	300
300	316	3980	0	0,3	330

NORMS

ISO 1307



CORDFLEX AIR/P

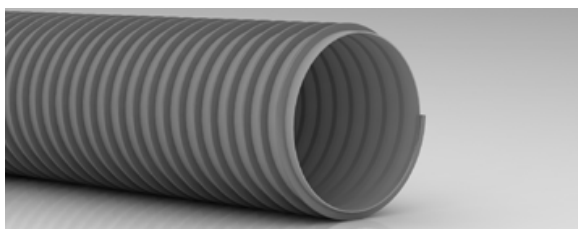

CONSTRUCTION EXTREMELY LIGHT AND FLEXIBLE PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.


COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT
CORRUGATED OUTSIDE.

APPLICATION INDUSTRIAL VENTILATION AND AIRFLOW SYSTEMS. SUCTION OF DUST, AIR, GASES,
POWDERS, LIQUIDS ETC.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	26	115	2	0,6	20
25	31,6	155	2	0,55	25
30	36,6	210	2	0,55	30
32	39	230	1,5	0,55	32
35	43	260	1,5	0,55	35
38	46	300	1,5	0,55	38
40	49	320	1,5	0,55	40
45	53	395	1,5	0,5	45
50	59	485	1,5	0,5	50
60	71	580	1,5	0,5	60
70	81	680	1,5	0,5	70
75	86	755	1,5	0,5	75
80	92	870	1,5	0,5	80
90	103	1020	1,5	0,5	90
100	124	1210	1	0,5	100
110	125	1360	1	0,45	110
120	135	1455	1	0,45	120
125	140	1550	1	0,45	125
130	144	1650	1	0,45	130
140	154	1800	1	0,45	140
150	164	1965	1	0,4	150
160	175	2280	0,5	0,3	160
180	195	2500	0,5	0,3	180
203	220	3055	0,5	0,2	203
250	270	3900	0,25	0,15	250
300	325	5500	0,25	0,1	300

NORMS

ISO 1307




THERMOCORD HL

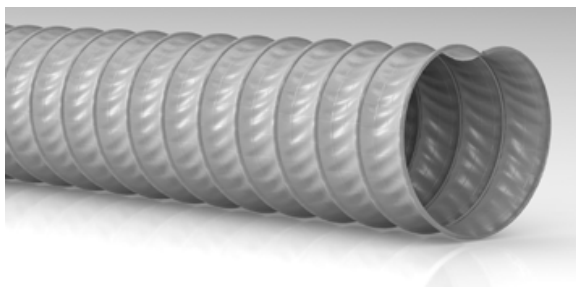

CONSTRUCTION EXTREMELY LIGHT AND FLEXIBLE, COMPOSED BY POLYESTER FABRIC,
POLYOLEFIN AND STEEL SPIRAL
COVER OUTSIDE CORRUGATED
APPLICATION FOR VENTILATION AND AIR CONDITIONING

(mm)	BAR	M/sec	(mm)
51			0,6 x Di
63			0,6 x Di
70			0,6 x Di
80			0,6 x Di
89			0,6 x Di
102			0,6 x Di
110			0,6 x Di
121			0,6 x Di
127			0,6 x Di
133			0,6 x Di
140			0,6 x Di
152			0,6 x Di
160			0,6 x Di
180			0,6 x Di
203			0,6 x Di
254			0,6 x Di
305			0,6 x Di
356			0,6 x Di
406			0,6 x Di




THERMOCORD 130°C



CONSTRUCTION EXTREMELY LIGHT AND FLEXIBLE COMPOSED BY POLYESTER FABRIC SMEARED
OF PVC ON BOTH SIDES WITH STEEL SPIRAL COVERED WITH PVC.
COVER OUTSIDE CORRUGATED
APPLICATION FOR VENTILATION AND AIR CONDITIONING

(mm)	(gr/mt)	BAR	BAR	(mm)
40	120	0,90	0,24	0,7 x Di
45	130	0,80	0,20	0,7 x Di
50	145	0,80	0,20	0,7 x Di
60	170	0,80	0,16	0,7 x Di
65	182	0,70	0,14	0,7 x Di
70	198	0,70	0,14	0,7 x Di
80	227	0,60	0,10	0,7 x Di
90	254	0,50	0,09	0,7 x Di
100	285	0,50	0,09	0,7 x Di
110	310	0,50	0,08	0,7 x Di
120	342	0,50	0,08	0,7 x Di
125	356	0,40	0,08	0,7 x Di
130	370	0,40	0,08	0,7 x Di
140	398	0,25	0,06	0,7 x Di
150	427	0,25	0,06	0,7 x Di
160	527	0,20	0,06	0,7 x Di
180	590	0,20	0,06	0,7 x Di
200	660	0,20	0,05	0,7 x Di
250	825	0,10	0,04	0,7 x Di
300	990	0,06	0,03	0,7 x Di
350	1155	0,05	0,02	0,7 x Di
400	1320	0,04	0,01	0,7 x Di



THERMOCORD CALOR 150°C




CONSTRUCTION FLEXIBLE THERMOPLASTIC RUBBER HOSE WITH AN INTEGRATED STEEL SPIRAL.
COVER OUTSIDE CORRUGATED
APPLICATION EXCELLENT OIL AND CHEMICAL RESISTANCE, GOOD RESISTANCE TO ABRASION, AGING AND ATMOSPHERIC CONDITIONS. FOR SUCTION AND PRESSURE OF SMOKE, AIR, VAPORS, EXHAUST GAS, DUST, GRAINS, PELLETS, ETC. IDEAL FOR EVACUATION OF ACID FUMES, HOT AIR AND FUMES

(mm)	gr/mt	BAR	BAR	(mm)
25	180	1	3	25
30	200	1	3	30
32	240	1	3	32
35	245	1	3	35
38	250	1	3	38
40	295	1	3	40
45	250	1	3	45
51	330	1	3	51
60	430	1	3	60
63	460	1	3	63
65	480	1	3	65
70	520	1	2,5	70
76	530	1	2,5	76
80	540	1	2,5	80
90	580	1	2,5	90
102	725	1	2,5	102
110	860	1	2,5	110
120	930	1	2,5	120
125	945	1	2,5	125
127	950	0,5	2,5	127
130	980	0,5	1,2	130
140	1000	0,5	1,2	140
152	1050	0,5	1,2	152
160	1150	0,5	1	160
180	1230	0,5	0,5	180
203	1300	0,5	0,5	203
254	2100	0,5	0,3	254

mt.20 up to ø 152,
mt.10 for superior ø

-40°C / + 125°C with peaks up to 150°C
-40°F / + 257°F

THERMOCORD NEOPRENE 150°C - 1 LAYER

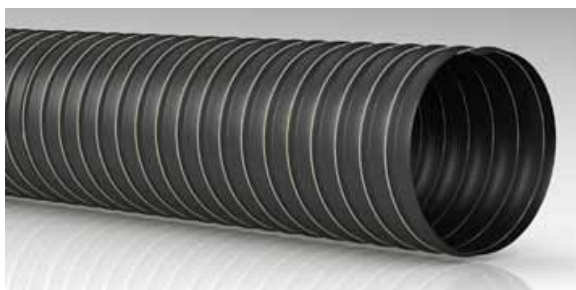

CONSTRUCTION FLEXIBLE HOSE COMPOSED BY A LAYER OF GLASS-FIBER FABRIC SMEARED OF NEOPRENE INSIDE AND VISIBLE SPIRAL IN COPPERED HARMONIC STEEL, EXTERNAL IN GLASS-FIBER.
COVER OUTSIDE CORRUGATED
APPLICATION FOR SUCTION AND DELIVERY OF AIR AND HOT FUMES

(mm)	BAR	Mm/ca	gr/mt	(mm)
19	1,7	5300	80	6
25	1,6	5100	120	8
38	1,3	5000	168	12
51	1,2	4300	250	16
63	1,1	4000	300	20
76	1,1	3400	410	25
89	1,0	3000	490	29
95	0,9	2800	550	33
102	0,9	2600	650	35
114	0,9	2200	720	40
127	0,8	1700	800	46
152	0,7	1400	980	50
178	0,6	1100	1190	60
203	0,5	700	1330	68
254	0,4	450	1650	100
305	0,1	300	2000	116


Ø OF PRODUCTION

19 - 25 - 28 - 30 - 32 - 35 - 38 - 39 - 41 - 44 - 51 - 55 - 57 - 60 - 63 - 64 - 65 - 70 - 76 - 80 - 83 - 90 - 95 - 102 - 114 - 120 - 127 - 130 - 140 - 152 - 160 - 165 - 170 - 180 - 203 - 229 - 254 - 305

mt. 4

-55°C / + 130°C
with peaks up to 150°C
-67°F / + 194°F

THERMOCORD NEOPRENE 150°C - 2 LAYERS

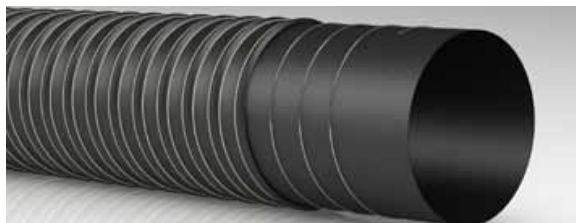

CONSTRUCTION FLEXIBLE HOSE COMPOSED BY TWO LAYERS OF NEOPRENE COATED FIBERGLASS FABRIC, EMBEDDED COPPER-PLATED STEEL WIRE HELIX AND EXTERNAL DOUBLE FIBERGLASS CORD.



COVER OUTSIDE CORRUGATED

APPLICATION FOR THE SUCTION AND THE INDUSTRIAL VENTILATION

(mm)	BAR	Mm/ca	gr/mt	(mm)
19	3	7300	110	9
25	2,8	7100	185	12
38	2,6	6000	305	18
51	2,6	5200	360	24
63	2,4	4600	485	31
76	2,2	4300	580	38
89	2,0	4000	690	44
95	1,9	3700	730	49
102	1,9	3500	770	52
114	1,5	3000	845	60
127	1,4	2400	925	69
152	1,2	1700	1200	75
178	1,0	1200	1430	90
203	0,7	900	1650	101
254	0,5	700	2090	150
305	0,3	500	2550	200

Ø OF PRODUCTION

19 - 25 - 28 - 30 - 32 - 35 - 38 - 39 - 41 - 44 - 51 - 55 - 57 - 60 - 63 - 64 - 65 - 70 - 76 - 80 - 83 - 90 - 95 - 102 - 114 - 120 - 127 - 130 - 140 - 152 - 160 - 165 - 170 - 180 - 203 - 229 - 254 - 305



THERMOCORD SILICONE 300°C - 1 LAYER



CONSTRUCTION FLEXIBLE HOSE MADE OF A LAYER OF SILICONE-COATED FIBERGLASS FABRIC, INTERNAL AND VISIBLE COPPER-PLATED STEEL WIRE HELIX AND EXTERNAL FIBERGLASS CORD.



COVER OUTSIDE CORRUGATED

APPLICATION FOR SUCTION, EXTRACTION AND BLOWING AIR WITH DUST PARTICLES ALSO AT HIGH TEMPERATURES.


(mm)	BAR	Mm/ca	gr/mt	(mm)
19	1,7	5300	80	6
25	1,6	5100	120	8
38	1,3	5000	168	12
51	1,2	4300	250	16
63	1,1	4000	300	20
76	1,1	3400	410	25
89	1,0	3000	490	29
95	0,9	2800	550	33
102	0,9	2600	650	35
114	0,9	2200	720	40
127	0,8	1700	800	46
152	0,7	1400	980	50
178	0,6	1100	1190	60
203	0,5	700	1330	68
254	0,4	450	1650	100
305	0,1	300	2000	116

Ø OF PRODUCTION

19 - 25 - 28 - 30 - 32 - 35 - 38 - 39 - 41 - 44 - 51 - 55 - 57 - 60 - 63 - 64 - 65 - 70 - 76 - 80 - 83 - 90 - 95 - 102 - 114 - 120 - 127 - 130 - 140 - 152 - 160 - 165 - 170 - 180 - 203 - 229 - 254 - 305



THERMOCORD SILICONE 300°C - 2 LAYERS

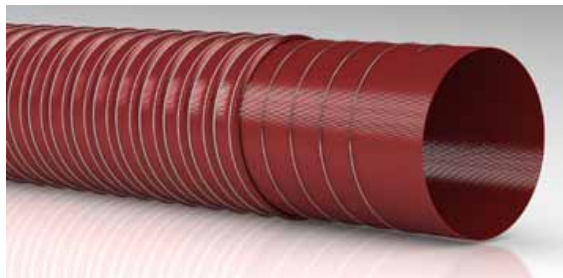

CONSTRUCTION FLEXIBLE HOSE COMPOSED BY TWO LAYERS OF SILICONE COATED FIBERGLASS FABRIC, EMBEDDED COPPER-PLATED STEEL WIRE HELIX AND EXTERNAL DOUBLE FIBERGLASS CORD.


COVER OUTSIDE CORRUGATED

APPLICATION FOR SUCTION, EXTRACTION AND BLOWING AIR WITH DUST PARTICLES ALSO AT HIGH TEMPERATURES.

(mm)	BAR	Mm/ca	gr/mt	(mm)
19	3	7300	110	9
25	2,8	7100	185	12
38	2,6	6000	305	18
51	2,6	5200	360	24
63	2,4	4600	485	31
76	2,2	4300	580	38
89	2	4000	690	44
95	1,9	3700	730	49
102	1,9	3500	770	52
114	1,5	3000	845	60
127	1,4	2400	925	69
152	1,2	1700	1200	75
178	1	1200	1430	90
203	0,7	900	1650	101
254	0,5	700	2090	150
305	0,3	500	2550	200

Ø OF PRODUCTION

19 - 25 - 28 - 30 - 32 - 35 - 38 - 39 - 41 - 44 - 51 - 55 - 57 - 60 - 63 - 64 - 65 - 70 - 76 - 80 - 83 - 90 - 95 - 102 - 114 - 120 - 127 - 130 - 140 - 152 - 160 - 165 - 170 - 180 - 203 - 229 - 254 - 305



CORDFLEX AIR PU




CONSTRUCTION FLEXIBLE POLYURETHANE HOSE WITH SHOCK RESISTANT PVC SPIRAL.
COVER IN POLYURETHANE, EXCELLENT RESISTANCE TO ABRASION
APPLICATION FOR SUCTION OF AIR AND DUSTS IN THE INDUSTRY, AGRICULTURE AND CERAMICS AND WOOD INDUSTRY.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	25	100	0,35	0,5	20
25	30,4	150	0,35	0,5	25
30	36,0	190	0,35	0,5	30
32	38,0	200	0,35	0,5	32
35	41,4	215	0,35	0,4	35
38	44,6	230	0,4	0,4	38
40	46,6	250	0,4	0,4	40
45	51,8	280	0,45	0,4	45
50	57,0	310	0,5	0,4	50
60	67,4	390	0,5	0,4	60
63	70,6	430	0,5	0,4	63
70	78,4	500	0,55	0,4	70
75	83,8	550	0,55	0,4	75
80	89,0	610	0,55	0,4	80
90	99,4	715	0,55	0,4	90
100	110,4	820	0,60	0,4	100
110	120,4	890	0,60	0,3	110
120	131,0	950	0,60	0,3	120
125	136,6	1000	0,65	0,3	125
150	162,8	1365	0,7	0,3	150
160	173,0	1550	0,7	0,3	160
180	193,4	1900	0,7	0,3	180
200	213,6	2100	0,8	0,3	200

NORMS

REG. UE 10/2011 Simulant D2 e E
ISO 1307



CORDFLEX AIR PU ANTISTATIC




CONSTRUCTION FLEXIBLE POLYURETHANE HOSE WITH SHOCK RESISTANT PVC SPIRAL AND EXTERNAL COPPER WIRE
COVER IN POLYURETHANE, EXCELLENT RESISTANCE TO ABRASION
APPLICATION FOR SUCTION OF AIR AND DUSTS IN THE INDUSTRY, AGRICULTURE AND CERAMICS AND WOOD INDUSTRY.
UPON REQUEST IT COULD BE PROVIDED WITH ANTISTATIC COMPOUND.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	25	100	0,35	0,5	20
25	30,4	150	0,35	0,5	25
30	36,0	190	0,35	0,5	30
32	38,0	200	0,35	0,5	32
35	41,4	215	0,35	0,4	35
38	44,6	230	0,4	0,4	38
40	46,6	250	0,4	0,4	40
45	51,8	280	0,45	0,4	45
50	57,0	310	0,5	0,4	50
60	67,4	390	0,5	0,4	60
63	70,6	430	0,5	0,4	63
70	78,4	500	0,55	0,4	70
75	83,8	550	0,55	0,4	75
80	89,0	610	0,55	0,4	80
90	99,4	715	0,55	0,4	90
100	110,4	820	0,60	0,4	100
110	120,4	890	0,60	0,3	110
120	131,0	950	0,60	0,3	120
125	136,6	1000	0,65	0,3	125
150	162,8	1365	0,7	0,3	150
160	173,0	1550	0,7	0,3	160
180	193,4	1900	0,7	0,3	180
200	213,6	2100	0,8	0,3	200

NORMS

REG. UE 10/2011 Simulant D2 e E
ISO 1307




AAG CATALOGUE

vacuum spiral polyurethane hoses




AEROCORD PU

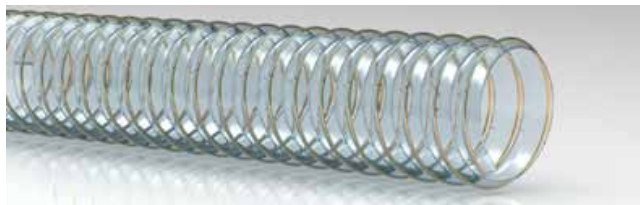


CONSTRUCTION FLEXIBLE POLYURETHANE HOSE WITH BUILT-IN COPPER PLATED STEEL SPIRAL
COVER IN POLYURETHANE, EXCELLENT RESISTANCE TO ABRASION
APPLICATION FOR SUCTION OF AIR AND DUSTS IN THE PHARMACEUTICAL WOOD AND INDUSTRY, AGRICULTURE AND CERAMICS.

NORMS

REG. UE 10/2011 Simulant A,B,C, D2 e E
ISO 1307 ISO 1307

 mt 20, mt 10 up to Ø 250

 -40°C / +90°C
-40°F / +194°F

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25		110	1	0,3	25
30		125	1	0,3	30
32		130	1	0,3	32
35		140	1	0,3	35
38		145	1	0,3	38
40		150	1	0,3	40
45		200	1	0,3	45
50		210	1	0,3	50
51		220	1	0,3	51
55		240	1	0,3	55
60		250	1	0,3	60
63		260	1	0,3	63
65		270	1	0,3	65
70		320	1	0,3	70
75		350	1	0,25	75
76		370	1	0,25	76
80		420	1	0,25	80
90		450	1	0,25	90
100		490	1	0,25	100
110		550	1	0,25	110
120		600	1	0,25	120
127		600	0,5	0,25	127
130		640	0,5	0,12	130
140		680	0,5	0,12	140
152		860	0,5	0,12	152
160		900	0,5	0,1	160
180		920	0,5	0,05	180
203		1020	0,5	0,05	203
254		1300	0,5	0,03	254
305		1500	0,5	0,03	305
355		1650	0,5	0,02	355

AEROCORD PU/ECO




CONSTRUCTION FLEXIBLE POLYURETHANE HOSE WITH BUILT- STEEL SPIRAL
COVER IN POLYURETHANE, EXCELLENT RESISTANCE TO ABRASION
APPLICATION FOR SUCTION OF AIR AND DUSTS IN THE PHARMACEUTICAL, WOOD AND CAR INDUSTRY, AGRICULTURE AND CERAMICS.

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
50		285		0,2	35
60		255		0,15	42
70		300		0,13	55
80		340		0,1	60
90		380		0,09	67
100		410		0,09	75
120		550		0,07	90
125		565		0,06	92
130		580		0,06	95
140		680		0,05	100
150		765		0,05	110
160		815		0,05	120
180		860		0,04	130
200		955		0,04	150
250		1150		0,03	180
300		1385		0,02	220
350		2030		0,02	250

NORMS

ISO 1307

 -40°C / +90°C
-40°F / +194°F

 mt 20, mt 10 up to Ø 250

AAG CATALOGUE

vacuum spiral polyurethane hoses



AEROCORD PU - H



CONSTRUCTION POLYURETHANE HOSE WITH GALVANIZED STEEL COPPER SPIRAL WIRE.
TRANSPARENT, SPIRALE CUIVRÉE
COVER IN POLYURETHANE, EXCELLENT RESISTANCE TO ABRASION
APPLICATION SUITABLE FOR SUCTION OF ABRASIVE DUST AND FOR CONTACT WITH FOOD
WITH A PRESENCE OF OILS AND FATS ACCORDING TO EU REGULATION 10/2011
SIMULANTS A, B, C, D2 AND E. PRODUCT RECOMMENDED IN PANEL BEATERS,
WOOD INDUSTRY, CERAMIC INDUSTRY AND IN PHARMACEUTICAL INDUSTRY

					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25		180	1	0,3	25
30		200	1	0,3	30
32		240	1	0,3	32
38		250	1	0,3	38
40		270	1	0,3	40
45		280	1	0,3	45
50		330	1	0,3	50
60		440	1	0,3	60
63		460	1	0,3	63
70		490	1	0,25	70
75		530	1	0,25	75
80		500	1	0,25	80
90		680	1	0,25	90
100		700	1	0,25	100
110		720	1	0,25	110
120		1000	1	0,25	120
127		1100	0,5	0,25	127
130		1100	0,5	0,12	130
140		1150	0,5	0,12	140
152		1250	0,5	0,12	152
160		1280	0,5	0,1	160
180		1350	0,5	0,05	180
203		1500	0,5	0,05	203
254		2300	0,5	0,03	254
305		3200	0,5	0,03	305

NORMS

REG. UE 10/2011 SIMULANT A,B,C, D2 e E
ISO 1307

 mt 20, mt 10 up to Ø 250

 - 40°C / +90°C
- 40°F / +194°F

AAG CATALOGUE

oil suction delivery spiral pvc hoses



CORDFLEX OIL S.E.




CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH OIL RESISTANT PVC/NBR COMPOUND.
SHOCK RESISTANT PVC SPIRAL.
COVER CRUSHING, CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT, LIGHT CORRUGATED OUTSIDE
APPLICATION FOR MEDIUM DUTY SUCTION AND DELIVERY OF INDUSTRIAL OILS AND FUELS FOR USE IN COLD CLIMATES

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	4,6	450	8	0,8	80
25	4,6	580	8	0,8	100
30	4,8	650	8	0,8	120
32	4,8	670	8	0,8	128
35	5	720	7	0,8	140
38	5	770	7	0,8	152
40	5	815	7	0,8	160
45	5,1	960	7	0,8	180
50	5,6	1150	7	0,8	200
60	5,9	1530	6	0,8	240
63	6	1580	6	0,8	252
70	6,1	1820	6	0,8	280
75	6,2	1920	5	0,8	300
80	6,4	2100	4	0,8	320
90	6,6	2400	4	0,8	360
100	7,2	3200	3	0,8	400
120	7,9	3800	3	0,7	480
152	9,8	6150	2,5	0,7	608

NORMS

ISO 1307



CORDFLEX OIL ANTISTATIC




CONSTRUCTION STRONG, FLEXIBLE AND SMOOTH OIL RESISTANT PVC/NBR COMPOUND.
SHOCK RESISTANT PVC SPIRAL.
COVER CORRUGATED OUTSIDE. LONGITUDINAL CONDUCTIVE WIRE, APPLICATION
APPLICATION FOR HEAVY DUTY SUCTION AND DELIVERY OF INDUSTRIAL OILS AND FUELS, FOR USE IN COLD CLIMATES.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	4,6	450	8	0,8	80
25	4,6	580	8	0,8	100
30	4,8	650	8	0,8	120
32	4,8	670	8	0,8	128
35	5	720	7	0,8	140
38	5	770	7	0,8	152
40	5	815	7	0,8	160
45	5,1	960	7	0,8	180
50	5,6	1150	7	0,8	200
60	5,9	1530	6	0,8	240
63	6	1580	6	0,8	252
70	6,1	1820	6	0,8	280
75	6,2	1920	5	0,8	300
80	6,4	2100	4	0,8	320
90	6,6	2400	4	0,8	360
100	7,2	3200	3	0,8	400
120	7,9	3800	3	0,7	480
152	9,8	6150	2,5	0,7	608

NORMS

ISO 1307



CORDFLAT L LIGHT

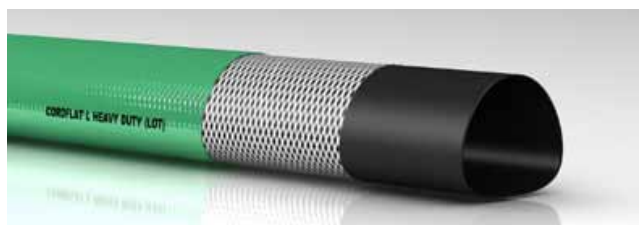


CONSTRUCTION FLEXIBLE PVC LINING.
HIGH TENSILE SYNTHETIC TEXTILE.
COVER LIGHT CHEMICALS AND WEATHER RESISTANT PVC OUTER COVER.
APPLICATION FOR LIGHT DUTY DISCHARGE OF WATER IN AGRICULTURE AND INDUSTRY


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25		170	5	15	
32		200	5	15	
38		240	5	14	
40		250	5	13	
45		260	5	13	
50		270	5	12	
55		320	5	12	
60		340	5	12	
63		360	5	12	
70		400	4	9	
76		430	4	9	
80		450	4	9	
90		530	4	9	
100		620	3	8	
150		1100	2	6	

NORMS

ISO 1307



CORDFLAT M MEDIUM

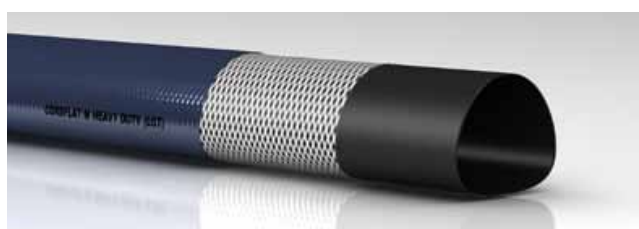


CONSTRUCTION FLEXIBLE PVC LINING.
HIGH TENSILE SYNTHETIC TEXTILE.
COVER LIGHT CHEMICALS AND WEATHER RESISTANT PVC OUTER COVER.
APPLICATION FOR STANDARD DUTY DISCHARGE OF WATER IN AGRICULTURE AND INDUSTRY.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
32		220	8	20	
38		260	7	18	
40		280	7	18	
45		310	7	18	
50		360	7	18	
60		430	6	16	
63		440	6	16	
70		470	6	16	
76		520	6	16	
80		560	6	16	
90		640	6	14	
100		760	4	14	
150		1280	3,5	9	
200		2000	2,5	7	

NORMS

ISO 1307



CORDFLAT P HEAVY




CONSTRUCTION FLEXIBLE PVC/NBR LINING.
HIGH TENSILE SYNTHETIC TEXTILE.
COVER LIGHT CHEMICALS AND WEATHER RESISTANT PVC OUTER COVER.
APPLICATION FOR MEDIUM DUTY DISCHARGE OF WATER, LIGHT CHEMICALS AND OTHER LIQUIDS IN AGRICULTURE AND INDUSTRY.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
25		225	12	35	
30		250	10	30	
32		260	10	30	
35		280	10	25	
38		300	10	25	
40		320	10	25	
45		350	10	25	
51		410	9	25	
60		540	9	25	
63		560	9	25	
70		620	9	25	
76		680	9	25	
80		740	9	25	
90		860	9	25	
100		1050	8	23	
125		1350	6	18	
152		1750	4	11	
200		2400	2,5	8	

NORMS

ISO 1307



CORDFLAT I INDUSTRIAL




CONSTRUCTION FLEXIBLE PVC/NBR LINING.
HIGH TENSILE SYNTHETIC TEXTILE.
COVER LIGHT CHEMICALS AND WEATHER RESISTANT PVC OUTER COVER.
APPLICATION FOR HEAVY DUTY DISCHARGE OF WATER, LIGHT CHEMICALS AND OTHER LIQUIDS IN AGRICULTURE AND INDUSTRY.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
38		450	16	48	
40		490	16	48	
45		520	16	48	
51		600	16	48	
63		840	16	48	
76		960	13	33	
80		1020	13	33	
90		1150	13	33	
100		1400	13	33	
152		2750	7	21	
200		3500	5	15	

NORMS

ISO 1307



FRUTCORD 25 BAR




TUBE SPECIAL PVC COMPOUND RESISTANT TO PESTICIDES AND FERTILIZERS.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION , OZONE AND WEATHER RESISTANT SPECIAL PVC COMPOUND.
 APPLICATION FOR SPRAYING OF PESTICIDES AND FERTILIZERS IN AGRICULTURE.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
6	12	102	25	75	
8	13	125	25	75	
10	15	150	25	75	
13	19	225	25	75	
16	22	265	25	75	
19	26	360	25	75	

NORMS

ISO 1307



mt 100 up to Ø 13 - mt 50 up to Ø16 and over

FRUTCORD 40 BAR



TUBE SPECIAL PVC COMPOUND RESISTANT TO PESTICIDES AND FERTILIZERS.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION , OZONE AND WEATHER RESISTANT SPECIAL PVC COMPOUND.
 APPLICATION FOR SPRAYING OF PESTICIDES AND FERTILIZERS IN AGRICULTURE.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
8	14	158	40	120	
10	16	185	40	120	
13	19	225	40	120	
16	23	300	40	120	
19	26	360	40	120	
25	34	565	40	120	

NORMS

ISO 1307



mt 100 up to Ø 13 - mt 50 up to Ø16 and over

FRUTCORD 50 BAR





TUBE SPECIAL PVC COMPOUND RESISTANT TO PESTICIDES AND FERTILIZERS.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION, OZONE AND WEATHER RESISTANT SPECIAL PVC COMPOUND.
 APPLICATION FOR SPRAYING OF PESTICIDES AND FERTILIZERS IN AGRICULTURE.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
8	14,5	175	50	150	
10	17	217	50	150	

NORMS

ISO 1307



FRUTCORD 80 BAR




TUBE SPECIAL PVC COMPOUND RESISTANT TO PESTICIDES AND FERTILIZERS.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION, OZONE AND WEATHER RESISTANT SPECIAL PVC COMPOUND.
 APPLICATION FOR SPRAYING OF PESTICIDES AND FERTILIZERS IN AGRICULTURE.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
8	15	185	80	200	
10	18	245	80	200	
13	22	260	80	200	
16	25	402	80	160	
19	29	580	80	160	

NORMS

ISO 1307



FRUTCORD 100 BAR




TUBE
REINFORCEMENT
COVER
APPLICATION

SPECIAL PVC COMPOUND RESISTANT TO PESTICIDES AND FERTILIZERS.
HIGH TENSILE SYNTHETIC TEXTILE.
ABRASION ,OZONE AND WEATHER RESISTANT SPECIAL PVC COMPOUND.
FOR SPRAYING OF PESTICIDES AND FERTILIZERS IN AGRICULTURE.


					
(mm)	(mm)	gr/mt	BAR	BAR	(mm)
8	16	211	100	300	
10	19	284	100	300	
13	23	392	100	300	

NORMS

ISO 1307



- 10°C / +60°C
+14°F / +140°F



mt 100

PRESSCORD 10 BAR



TUBE SPECIAL SYNTHETIC THERMORUB COMPOUND.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION AND WEATHER RESISTANT SPECIAL THERMORUB COMPOUND.
 APPLICATION GARDENING AND GENERAL WATER DISCHARGE SERVICES.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
8	15	191	10	30	
10	17	224	10	30	
12	17	171	10	30	
13	19	225	10	30	
15	21	254	10	30	
16	23	321	10	30	
19	26	372	10	30	
20	30	550	10	30	
22	30	465	10	30	
25	33	510	10	30	
25	35	650	10	30	

NORMS

ISO 1307



mt 100 up to Ø 13 - mt 50 up to Ø16 and over

PRESSCORD 20 BAR



TUBE SPECIAL OIL MIST RESISTANT SYNTHETIC THERMORUB COMPOUND.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION AND WEATHER RESISTANT SPECIAL THERMORUB COMPOUND.
 APPLICATION FOR PNEUMATIC EQUIPMENTS AND TOOLS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
6	14	189	20	60	
8	17	266	20	60	
10	19	308	20	60	
13	23	423	20	60	
16	26	495	20	60	
19	30	636	20	60	
25	37	780	20	60	

NORMS

ISO 1307



mt 100 up to Ø 13 - mt 50 up to Ø16 and over

PRESSCORD PU POLYURETHANE




TUBE BLACK PU COMPOUND.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION, OZONE AND WEATHER RESISTANT PVC COMPOUND.
 APPLICATION HIGH PERFORMANCE TRANSFER OF AIR, OILS AND LIGHT CHEMICALS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
6	10	70	20	60	
8	12	85	20	60	
10	15	135	20	60	
13	19	195	20	60	

NORMS

ISO 1307



PRESSCORD SUPER





TUBE SPECIAL THERMORUB COMPOUND.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION, WEATHER AND OIL RESISTANT SPECIAL THERMORUB COMPOUND.
 APPLICATION FOR PNEUMATIC EQUIPMENTS IN CAR SERVICE STATIONS.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
6	12	110	25	75	
8	13	108	25	75	
10	15	129	25	75	
13	19	195	25	75	

NORMS

ISO 1307



ELBACORD NO TWIST




TUBE: BLACK PLASTICIZED PVC.
 REINFORCEMENT: HIGH TENSILE SYNTHETIC TEXTILE.
 COVER: ABRASION, OZONE AND WEATHER RESISTANT BLUE PVC.
 APPLICATION: GARDENING, IRRIGATION AND GENERAL WATER DISCHARGE.

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
13	2,5	140	10	26	
16	2,6	180	10	23	
19	3,0	250	10	21	
25	3,3	370	10	17	

NORMS

ISO 1307



GARDENCORD VG




TUBE: YELLOW PLASTICIZED PVC.
 REINFORCEMENT: HIGH TENSILE SYNTHETIC TEXTILE.
 COVER: ABRASION, OZONE AND WEATHER RESISTANT GREEN PVC.
 APPLICATION: GARDENING, IRRIGATION AND GENERAL WATER DISCHARGE.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
10	2,5	110	10	30	
13	2,8	170	10	32	
16	2,8	200	10	32	
19	3,0	260	10	32	
22	3,0	300	10	21	
25	3,5	420	10	32	
30	4,0	529	5	15	

NORMS

ISO 1307



NEMOCORD NO TWIST

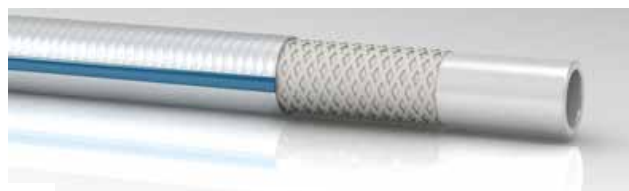


TUBE: WHITE TRANSPARENT PLASTICIZED PVC
 REINFORCEMENT: HIGH TENSILE SYNTHETIC TEXTILE
 COVER: WHITE TRANSPARENT COVER WITH WHITE SUBSTRATE
 APPLICATION: GARDENING, IRRIGATION AND GENERAL WATER DISCHARGE

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
10	2,5	110	10	30	
13	2,8	170	10	32	
16	2,8	200	10	32	
19	3,0	260	10	32	
22	3,0	300	10	21	
25	3,5	420	10	32	
30	4,0	529	5	15	

NORMS

ISO 1307




AAG CATALOGUE

braided and not braided pvc hoses



CRISTALCORD

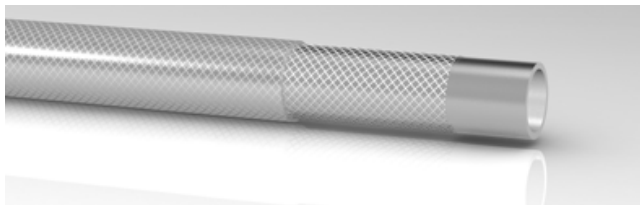



TUBE NON-TOXIC TRANSPARENT PVC.
 REINFORCEMENT HIGH TENSILE SYNTHETIC TEXTILE.
 COVER ABRASION, OZONE AND WEATHER RESISTANT TRANSPARENT PVC ALLOWING EASY INSPECTION DURING SERVICE.
 APPLICATION FOR CONVEYING FLUIDS, AIR, POWDERED FOODS, SALTS, LIGHT CHEMICALS.

				
(mm)	(mm)	gr/mt	BAR	BAR
5	3,0	81	20	60
6	3,0	83	20	60
7	3,0	119	20	60
8	3,0	117	20	60
10	3,0	138	15	45
12	3,0	159	10	30
13	3,0	169	10	30
15	3,0	190	10	30
16	3,0	201	10	30
19	3,5	280	10	30
22	4,0	374	8	24
25	4,0	417	8	24
30	4,0	490	7	21
32	4,5	560	7	21
35	5,0	686	7	21
38	5,0	743	5	15
40	5,0	777	5	15
45	5,0	840	5	15
50	5,0	949	5	15

NORMS

REG. UE 10/2011
 FOR SIMULANT TYPE A-B-C
 ISO 1307



 mt 100 up to Ø 13 - mt 50 up to Ø 16 and over

CRISTALLO ALIMENTARE





TUBE NON-TOXIC TRANSPARENT PVC.
 COVER ABRASION, OZONE AND WEATHER RESISTANT TRANSPARENT PVC ALLOWING EASY INSPECTION DURING SERVICE.
 APPLICATION FOR CONVEYING FLUIDS, AIR, POWDERED FOODS, SALTS, LIGHT CHEMICALS.

				
(mm)	(mm)	gr/mt	BAR	BAR
2	4	12		
3	5	15		
4	7	32		
5	8	40		
6	9	45		
7	10	57		
8	12	78		
10	14	95		
12	17	148		
14	19	170		
16	22	225		
18	24	260		
20	27	320		
22	30	395		
25	33	473		
30	40	680		


NORMS

REG. UE 10/2011
 FOR SIMULANT TYPE A-B-C
 ISO 1307



 mt 200 from Ø 2 to Ø 6 - mt 100 from Ø 7 to Ø 10
 mt 50 from Ø 18 and over

CRISTALSIL FDA

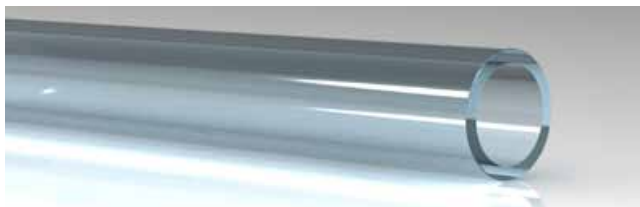

CONSTRUCTION: NEUTRAL NON TOXICAL SILICONE HOSE.
COVER: TRANSPARENT SILICON
APPLICATION: SUITABLE FOR FLUIDS IN FOOD INDUSTRY.


				
(mm)	(mm)	gr/mt	BAR	BAR
2	4	12		
3	5	16		
3	6	27		
4	6	20		
4	7	32		
4	8	48		
5	8	39		
5	9	56		
6	8	56		
6	9	45		
6	10	64		
6	12	108		
7	10	51		
7	11	72		
8	12	80		
9	12	63		
10	14	96		
12	16	112		
12	18	180		
14	18	126		
15	20	176		
18	24	253		

NORMS

REG. UE 10/2011
FOR SIMULANT TYPE A-B-C
ISO 1307




-60°C / +150°C (picchi 200°C)
-76°F / +302°F (392°F)



mt 100 up to Ø 10 - mt 50 up to Ø 7/15 - mt 25 up to Ø 16 and over

CRISTALBENZ

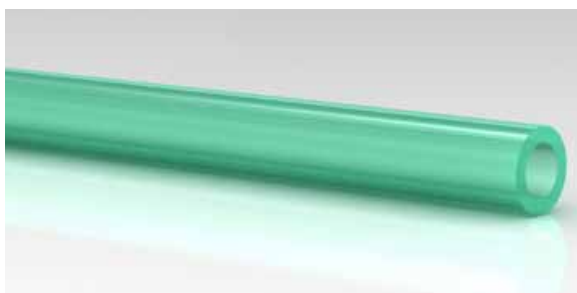

CONSTRUCTION: TRANSPARENT GREEN PVC
COVER: GREEN PVC
APPLICATION: SUITABLE FOR DELIVERY OF MINERAL OILS, FUELS, LUBRICANT AND MACHINERY
GEAR; PARTICULARLY SUITABLE WHERE THEY ARE REQUIRED OF LIGHTNESS
AND FLEXIBILITY CHARACTERISTICS.


[illegible]

NORMS

ISO 1307



- 5°C / +60°C
+23°F / +140°F



mt 25

CORDFLEX GUAINA UL 94 VO




CONSTRUCTION SELF- EXTINGUISHING, STRONG, FLEXIBLE AND VERY SMOOTH
PLASTICIZED PVC.
SHOCK RESISTANT PVC SPIRAL.
COVER CRUSHING HIGH CHEMICAL AGENTS, ABRASION AND WEATHER RESISTANT,
CORRUGATED OUTSIDE.
APPLICATION FOR PROTECTION AND INSULATION OF GAS PIPES.


(mm)	(mm)	gr/mt	BAR	BAR	(mm)
20	0,7	120		0,4	25
25	0,7	155		0,4	31
30	0,7	195		0,35	38
32	0,7	205		0,35	40
35	0,8	230		0,35	44
40	0,8	280		0,3	51
45	0,8	350		0,3	57
50	0,8	430		0,3	63

NORMS

ISO 1307



HELIPOLEN

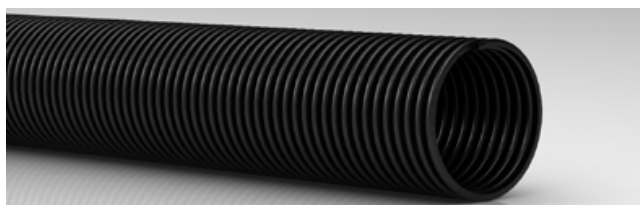


CONSTRUCTION POLYPROPYLENE HOSE
COVER OUTSIDE CORRUGATED
APPLICATION USED AS PROTECTIVE COVERING FOR OTHER HOSES, FOR AIR DELIVERY IN THE
CAR SECTOR

(mm)	(mm)	gr/mt	BAR	BAR	(mm)
7,2	10	18			10
9,4	11,4	20			11
10,4	13,4	22			13
11,4	15,1	25			15
14,4	18,1	35			18
17	21,2	40			21
20	24,5	50			24
26,5	30,5	69			30
28	32,2	74			32
30,5	35	85			35
35	40,5	100			40
40,5	47,5	110			47
50,5	57,8	175			57
61	68	225			68
70	78	265			78
80	89,5	310			89
90,5	99,5	350			99
100	110,5	410			110
120	129	515			129
140	155	650			155

NORMS

ISO 1307



MOLLAFLEX



APPLICATION PVC RIGID ANTIABRASION SPIRAL FOR THE PROTECTION OF HYDRAULIC HOSES AND MULTIPLE ELECTRIC CONDUITS

NOMINALE					PASSO SPIRALE
(mm)	(mm)	(mm)	(mm)	gr/mt	(mm)
13x16	13	15,4	1,2	50	10
16x20	16	18,4	1,2	62	12
20x25	20	23,6	1,8	120	14,5
24x29	23,5	27,3	1,9	160	15
27x32	27	30,8	1,9	195	16
30x35	30	34,4	2,2	230	18
35x40	35,5	40	2,2	280	20,5
44x50	43,5	48	2,3	400	23
56x63	56	61,5	2,7	570	26
65x75	66	73	3,5	770	30
80x90	82	90	3,8	1070	34
100x111	103	111	4,3	1550	46
120x131	124	132	5,4	2050	50

NORMS

ISO 1307



mt 20 up to Ø 80, mt. 10 from Ø 100 - 120